

GVS® BRAND PRODUCTS



API-6A Ball Valves



**API-6D Pressure Balanced
Lubricated Plug Valves**



API-6D Ball Valves



Global Supply Line are Guide Valve stockists, distributing Aust., NZ & PNG
Stock lists at our website: globalsupplyline.com.au
Contact us: sales@globalsupplyline.com.au



Soft Seated Ball Valves

- Bolted body type, 3-piece, Size Range: 1" to 60"
- ANSI Class 150 to 2500#
- Trunnion mounted, double block & bleed
- Double piston effect, single piston effect, or a combination of the two seat designs
- Full & reduced port
- Available with RF, RTJ, BW and Hub end connections
- All forged steel components
- Anti blow-out stem design
- Bubble tight shut-off
- Anti-static devices
- Firesafe certified to API 607, API 6FA, and ISO 10497:2010
- NACE MR0175 SOUR
- API 6D Monogram
- CSA Z245.15
- **SIL 3 certified by third party organization FSES**
- **Fugitive Emission certified to API 641 & ISO 15848-1**



Welded Body Ball Valves

- Welded body type, Size Range: 1 1/2" to 60"
- ANSI Class 150 to 2500#
- Trunnion mounted, double block & bleed
- Double piston effect, single piston effect, or a combination of the two seat designs
- Full & reduced port
- Available with RF, RTJ, and BW end connections
- All forged steel components
- Emergency grease stem sealing and seat-to-ball sealing
- Popping & Stem Extensions available for above and below grade
- Anti blow-out stem design
- Bubble tight shut-off
- Anti-static devices
- Firesafe certified to API 607, API 6FA, and ISO 10497:2010
- NACE MR0175 SOUR
- API 6D Monogram
- CSA Z245.15
- **SIL 3 certified by third party organization FSES**
- **Fugitive Emission certified to API 641 & ISO 15848-1**



Pressure Balanced, Lubricated Plug Valves

- Body type, 1 piece, Size Range: 2" to 30"
- ANSI Class 150 to 2500#
- Available with RF, RTJ, and BW end connections
- Available in Short, Venturi, and Regular patterns
- Cast steel body with forged steel trim
- Centering adjustment device
- Anti blow-out stem design
- Stem emergency grease fitting
- Anti-static devices
- Firesafe certified to API 607, API 6FA, and ISO 10497:2010
- Available NACE MR0175 SOUR
- API 6D Monogram
- Designed in accordance with CSA Z245.15 & API 599
- **Fugitive Emission certified to API 641**



Safety Excess Flow Valve

- Emergency safety shut-off valve
- Body type, 2-piece
- ANSI Class 150 to 2500#
- Available in sizes from 1/2" to 16"
- Available with RF, RTJ, BW, SW and NPT end connections
- Cast steel body and/or forged steel body
- In-line flow
- Bubble-tight shut-off
- Standard soft seating, optional metal seating
- Broad calibration range
- Firesafe design
- Available NACE MR0175 SOUR
- Effective operation with liquids or gases




API 6A Ball Valves



- Bolted body type, 2 & 3 piece
- Suitable for pressures up to 10,000 PSI
- Trunnion mounted, double block & bleed
- Double piston effect, single piston effect, or a combination of the two seat designs
- Full & reduced port
- Available with RF, RTJ, BW and Hub end connections
- All forged steel components
- Anti blow-out stem design
- Metal seated and soft seated with resin insert options
- Bubble tight shut-off
- Anti-static devices
- Firesafe certified to API 6FA
- NACE MR0175 SOUR
- API 6A Monogram

Metal Seated Ball Valves

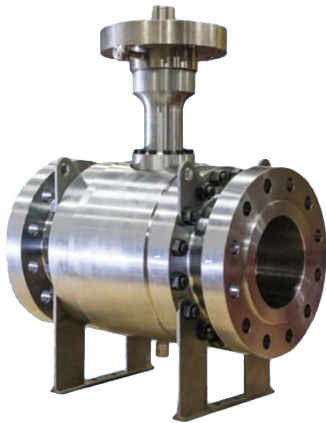

- Bolted body type, 3-piece, Size Range: 1" to 60"
- ANSI Class 150 to 2500#
- Trunnion mounted, double block & bleed
- Double piston effect, single piston effect, or a combination of the two seat designs
- Full & reduced port
- Available with RF, RTJ, BW and Hub end connections
- All forged steel components
- Anti blow-out stem design
- Optional shut-off ratings
- Anti-static devices
- Firesafe certified to API 607 & API 6FA
- NACE MR0175 SOUR
- API 6D Monogram
- CSA Z245.15
- SIL 3 certified by third party organization FSES
- Fugitive Emission certified to API 641 & ISO 15848-1 endurance class CO₂, tightness class CH

Severe Service Ball Valves



- Suitable for applications such as Hydrogen, CO₂, Acid Gas, Geothermal, etc.
- Bolted body type, 3-piece, Size Range: 1" to 60"
- ANSI Class 150 to 2500#
- Trunnion mounted, double block & bleed
- Double piston effect, single piston effect, or a combination of the two seat designs
- Full & reduced port
- Available with RF, RTJ, BW and Hub end connections
- All forged steel components
- Regular or recessed ball with self-flushing cavity
- Emergency grease stem sealing and seat-to-ball sealing available
- Anti blow-out stem design
- Soft seated, bubble-tight shut-off
- Anti-static devices
- Firesafe certified to API 607 & API 6FA
- NACE MR0175 SOUR
- API 6D Monogram
- CSA Z245.15
- SIL 3 certified by third party organization FSES
- Fugitive Emission certified to API 641 & ISO 15848-1 endurance class CO₃, tightness class AM

Cryogenic Service Ball Valves



- Bolted body type, 2 & 3 piece, Size Range: 1" to 60"
- ANSI Class 150 to 2500#
- Trunnion mounted
- Double piston effect x single piston effect seats
- Full & reduced port
- Available with RF, RTJ, BW and Hub end connections
- All forged stainless-steel components
- Anti blow-out stem design
- Soft seated
- Optional shut-off ratings
- Firesafe certified with anti-static devices
- API 6D Monogram
- CSA Z245.15
- SIL 3 certified by third party organization FSES



Guide Valve Limited

Head Office, Sales & Manufacturing

51 Terecar Dr., Unit 1
Woodbridge, ON CANADA L4L 0B5
Tel: 905-761-7877
Fax: 905-761-7917

Guide Valve Wuxi Limited Manufacturing

No. 30 Wanquan Road, Building M
Xi shan District, Wuxi
214101, China.

www.gvs-vci.com

Guide Valve Mexico SA de CV

Sales & Warehousing

Calle Alamo Plateado, No. 1
Fraccionamiento Los Alamos
C.P 53230
Naucalpan, Estado De Mexico
Mexico

Guide Valve Taiwan Limited Manufacturing

No. 272-1 Jung Shiau Road
Bali, New Taipei City
Taiwan.

sales@gvs-vci.com

Guide Valve USA Limited

Sales & Warehousing

16295 North Frwy Service Rd.
Building #17
Houston, Texas, 77090
USA.



Global Supply Line are Guide Valve stockists, distributing Aust., NZ & PNG
Stock lists at our website: globalsupplyline.com.au
Contact us: sales@globalsupplyline.com.au

Toll Free: 1-888-824-5693

GVSPB2025