




T1 THREADED STAR

FORGED STEEL BALL VALVES

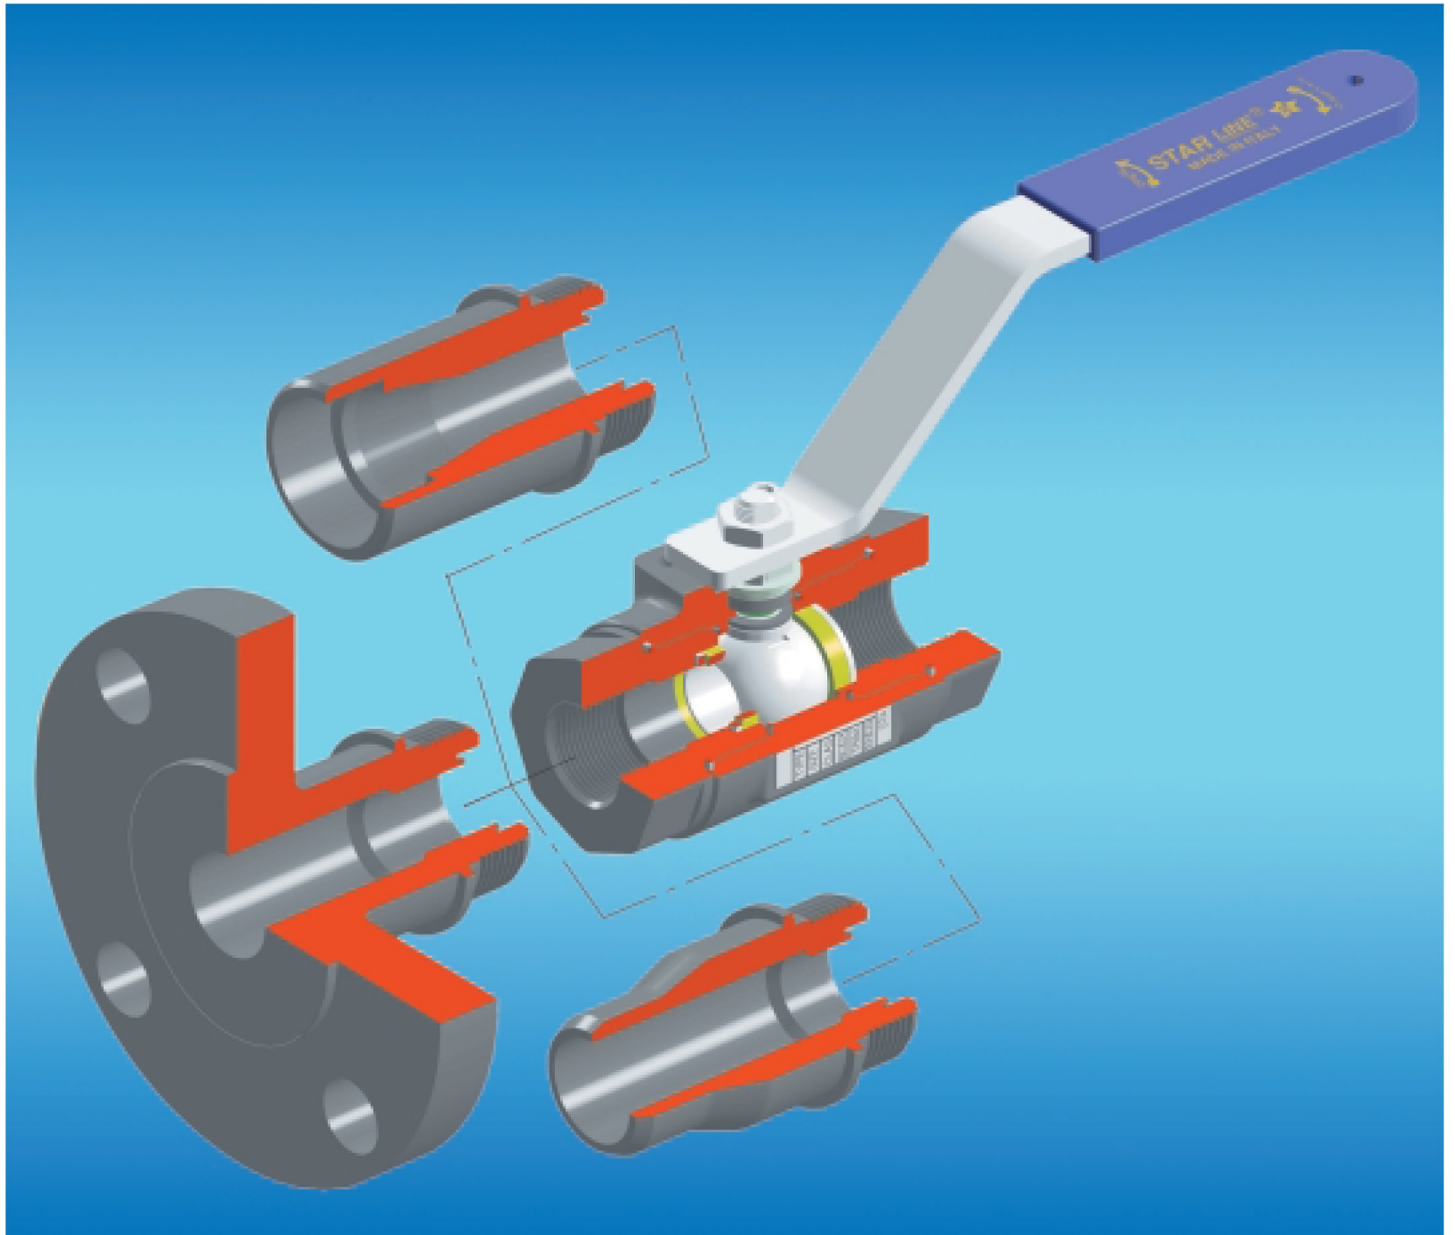

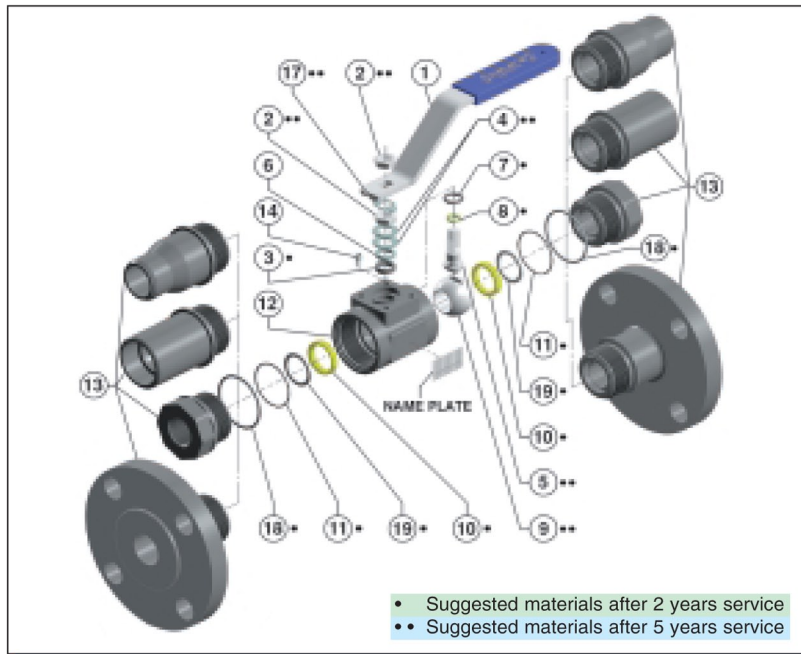

STARLINE Figure No.	Full Bore	T 113	T 115	T 116
	Reduced Bore	T 213	T 215	T 216
PART NO	PART NAME	MATERIALS A105 / 316	MATERIALS LF2 / 316	MATERIALS 316 / 316
NP	NAME PLATE	Stainless Steel	Stainless Steel	Stainless Steel
1	HANDLE	C.S. Zinc Plated+Plastic	C.S. Zinc Plated+Plastic	C.S. Zinc Plated+Plastic
** 2	HANDLE NUT	C.S. Zinc Plated	Stainless Steel	Stainless Steel
• 3	PACKING RING	Graphite - T - S	Graphite - T - S	Graphite - T - S
** 4	SPRING WASHER	Special S.S. For Springs	Special S.S. For Springs	Special S.S. For Springs
** 5	STEM	S.S. 316	S.S. 316	S.S. 316
• 6	GLAND PACKING	S.S. 316	S.S. 316	S.S. 316
• 7	THRUST WASHER	Reinforced PTFE	Reinforced PTFE	Reinforced PTFE
• 8	'O' RING STEM	Viton	Viton	Viton
** 9	BALL	S.S. 316	S.S. 316	S.S. 316
• 10	SEATS	T - S - N - D - P	T - S - N - D - P	T - S - N - D - P
• 11	FIRST BODY GASKET	Viton	Viton	Viton
12	BODY	ASTM A105N	ASTM A350 LF2	ASTM A182 F316
13	END CONNECTION	ASTM A105N	ASTM A305 LF2	ASTM A182 F316
14	STOP PIN	C.S. Zinc Plated	Stainless Steel	Stainless Steel
** 17	STOP WASHER	Stainless Steel	Stainless Steel	Stainless Steel
• 18	EMERGENCY BODY SEAL	Graphite	Graphite	Graphite
• 19	RING SEAL	PTFE - Graphite	PTFE - Graphite	PTFE - Graphite

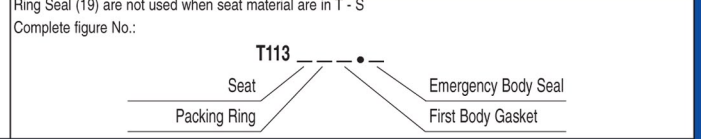

DESCRIPTION

DESIGN : THREE PIECES SCREWED CONSTRUCTION (SEAL WELDED ON REQUEST)
SOLID BALL - ANTI BLOW OUT PROOF STEM DESIGN - ENCAPSULATED SOFT SEATS - ANTISTATIC DEVICE - ISO 5211 ON THE TOP FOR EASY AUTOMATION
FIRE TEST APPROVED.

SIZE : DN 8 ÷ 80 FULL BORE -- DN 15 ÷ 100 REDUCED BORE
1/4" ÷ 3" FULL BORE -- 1/2" ÷ 4" REDUCED BORE

CLASS : ASME 150 ÷ 1500 LBS or 870 ÷ 5000 WOG/CWP or PN 16 ÷ 250
MATERIAL : ASTM A105 - LF2 - 316 - 316L
CONSTRUCTION : ASME B16.34 - BS5351 - API6D
MARKING : MSS SP25
TEST CERTIFICATE : UNI EN 10204 TYPE 3.1B UNLESS OTHERWISE REQUIRED
FIRE TEST APPROVED : BS6755 PART 2, - API607 - API6FA
SERVICES : FOR PETROLEUM, CHEMICALS, PETROLCHEMICALS, GAS APPLICATION AND ALLIED INDUSTRIES

FLOW DATA The following flow rates were determined for ball valves in fully open position and a water temperature of 60°F (15°C).
Kv value is the full capacity flow rate through the ball valve in cubic metres per hour (m³/h) with a pressure drop of 1 bar.
Cv value is the full capacity flow rate through the ball valve in gallons/min. of water at 60°F with a pressure drop of 1 psi.


REDUCED BORE

VALVE SIZE	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"	4"
Cv	8	13	32	48	82	120	275	460	700
KV	6,8	11	27,5	41	70	103	236	394	600


FULL BORE

VALVE SIZE	1/4"	3/8"	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"
Cv	8	8	12	30	45	78	115	265	445	680
KV	6,8	6,8	10	26	38	67	99	227	381	583


DIFFERENT CONFIGURATION



LOCKING DEVICE

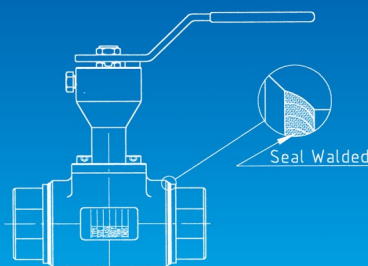

FUGITIVE EMISSION

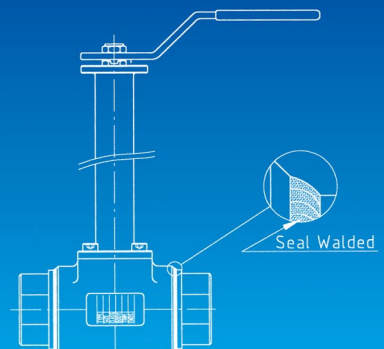


UNDERGROUND SERVICE

BSP Parallel: BS21Rp - ISO 228/1 - ISO 7/1Rp
 BSP Taper: BS21Rc - ISO 7/1Rc - DIN 2999/1
 NPT: ANSI B1 20.1

B.W. - P.E.: ANSI B16.25 Sch. 40 - XS - 80 - 160
 Note: other overall lengths are available on request.
 Instruction for welding the valve on the line:
 With the valve in open position tack-weld in four points on both ends and then complete the welding without dismantling the valve.

S.W.: ANSI B16.11
 Instruction for welding the valve on the line:
 With the valve in open position tack-weld in four points on both ends and then complete the welding without dismantling the valve.

FLANGES in according to ASME / ANSI B 16.5
 FACE to FACE in according to ASME / ANSI B16.10
 Note: when flanges are RF type of finish must be stated on the order

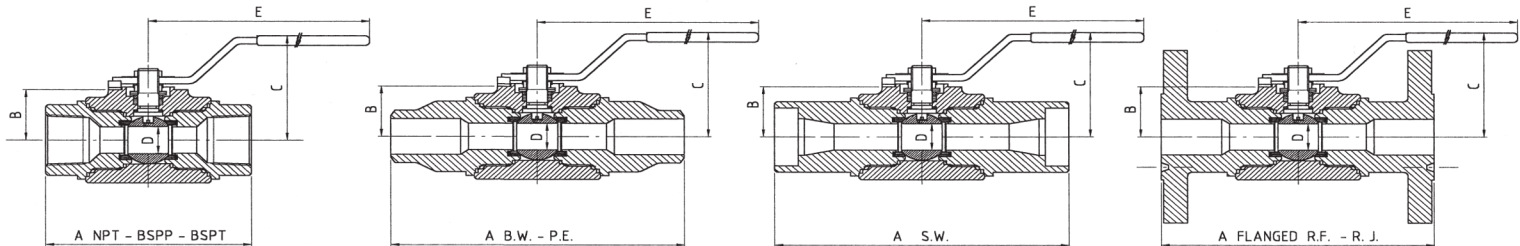

VALVE SIZE		DIMENSIONS mm / Inch											ISO 5211	WEIGHT KG/LBS											
		NPT BSPP BSPT	B.W. P.E. S.W.	A FLANGED										B	C	D	E	FLANGED							
				150		300		600		900		1500						150	300	600	900	1500			
				RF	RJ	RF	RJ	RF	RJ	RF	RJ	RF						RJ	RF	RJ	RF	RJ	RF	RJ	
mm	8	85	127	-	-	-	-	-	-	-	-	-	-	24	67.5	11.1	152	F03	1	1.4	-	-	-	-	-
Inch	1/4"	3.34	5	-	-	-	-	-	-	-	-	-	-	0.95	2.65	0.44	6	F03	2.2	3.1	-	-	-	-	-
mm	10	85	127	-	-	-	-	-	-	-	-	-	-	24	67.5	11.1	152	F03	1	1.4	-	-	-	-	-
Inch	3/8"	3.34	5	-	-	-	-	-	-	-	-	-	-	0.95	2.65	0.44	6	F03	2.2	3.1	-	-	-	-	-
mm	15	98.5	140	108	139.7	151	165	163.5	216	216	216	216	216	27	70	14.2	152	F04	1.2	1.6	2.8	3.3	4	5.6	5.6
Inch	1/2"	3.87	5.51	4.25	5.5	5.94	6.5	6.44	8.5	8.5	8.5	8.5	8.5	1.06	2.75	0.56	6	F04	2.6	3.5	6.2	7.3	8.8	12.3	12.3
mm	20	108	152.5	-	152.5	165	190.5	190.5	229	229	229	229	229	33.5	80	21	193	F04	2	2.4	-	4.9	5.6	8.4	8.4
Inch	3/4"	4.25	6	-	6	6.5	7.5	7.5	9	9	9	9	9	1.3	3.15	0.83	7.5	F04	4.4	5.3	-	10.8	12.3	18.5	18.5
mm	25	118	165	127	165	178	216	216	254	254	254	254	38	92	25.4	193	F04	2.7	3.8	4.9	6.5	7.3	10.9	10.9	
Inch	1"	4.64	6.5	5	6.5	7	8.5	8.5	10	10	10	10	1.5	3.65	1	7.5	F04	5.9	8.4	10.8	14.3	16	24	24	
mm	32	137	178	-	178	190.5	228.5	228.5	279.5	279.5	-	-	43.5	100	31.7	225	F05	3.8	4.9	-	9.5	10.3	13	-	
Inch	1 1/4"	5.39	7	-	7	7.5	9	9	11	11	-	-	1.7	3.95	1.25	9	F05	8.4	10.8	-	20.9	22.7	28.6	-	
mm	40	150	190.5	165	190.5	203	241	241	305	305	-	-	47.5	113	38	225	F05	5.3	6.7	8.9	12.5	14.5	19	-	
Inch	1 1/2"	5.9	7.5	6.5	7.5	8	9.5	9.5	12	12	-	-	1.9	4.45	1.5	9	F05	11.7	14.7	19.6	27.5	31.9	41.8	-	
mm	50	158.8	216	178	216	231.5	292	295	368.5	371.5	-	-	58.5	118	49	225	F05	8.5	11.5	13.9	17.5	19.5	31	-	
Inch	2"	6.25	8.5	7	8.5	9.12	11.5	11.5	14.5	14.62	-	-	2.3	4.65	1.93	9	F05	18.7	25.3	30.6	38.5	42.9	68.2	-	
mm	65	184	241	-	241	257	330	333	-	-	-	-	70	135	63.5	360	F07	14	18.3	-	25.5	28.5	-	-	
Inch	2 1/2"	7.24	9.5	-	9.5	10.12	13	13.12	-	-	-	-	2.75	5.35	2.5	14	F07	30.8	40.3	-	56.1	62.7	-	-	
mm	80	222	282.5	-	282.5	298.2	355.6	358.6	-	-	-	-	88	150	76	500	F07	23	29.3	-	43.5	49.5	-	-	
Inch	3"	8.74	11.12	-	11.12	11.74	14	14.12	-	-	-	-	3.5	4.85	3	20	F07	50.6	64.5	-	95.7	108.9	-	-	

VALVE SIZE		DIMENSIONS mm / Inch											ISO 5211	WEIGHT KG/LBS											
		NPT BSPP BSPT	B.W. P.E. S.W.	A FLANGED										B	C	D	E	FLANGED							
				150		300		600		900		1500						150	300	600	900	1500			
				RF	RJ	RF	RJ	RF	RJ	RF	RJ	RF						RJ	RF	RJ	RF	RJ	RF	RJ	
mm	15	85	127	108	139.7	151	165	163.5	216	216	216	216	216	24	67.5	11.1	152	F03	0.9	1.3	2.6	3.1	3.8	5.4	5.4
Inch	1/2"	3.34	5	4.25	5.5	5.94	6.5	6.44	8.5	8.5	8.5	8.5	8.5	0.95	2.65	0.44	6	F03	2	2.86	5.7	6.8	8.4	12.1	12.1
mm	20	98.5	140	117.5	152.5	165	190.5	190.5	229	229	229	229	27	70	14.2	152	F03	1.1	1.5	3.1	4	4.8	7.6	7.6	
Inch	3/4"	3.87	5.51	4.62	6	6.5	7.5	7.5	9	9	9	9	1.06	2.75	0.56	6	F03	2.4	3.3	6.8	8.8	10.6	16.7	16.7	
mm	25	108	152.5	127	165	178	216	216	254	254	254	254	33.5	80	21	193	F04	1.9	2.3	4.2	5.8	6.6	10.2	10.2	
Inch	1"	4.25	6	5	6.5	7	8.5	8.5	10	10	10	10	1.3	3.15	0.83	7.5	F04	4.2	5.1	9.2	12.8	14.5	22.4	22.4	
mm	32	118	165	139.7	178	190.5	228.5	228.5	279.5	279.5	279.5	279.5	38	92	25.4	193	F04	2.6	3.6	5.4	8.4	9.2	11	11	
Inch	1 1/4"	4.64	6.5	5.5	7	7.5	9	9	11	11	11	11	1.5	3.65	1	7.5	F04	5.7	7.9	11.9	18.5	20.2	24.2	24.2	
mm	40	137	178	165	190.5	203	241	241	305	305	-	-	43.5	100	31.7	225	F05	3.7	4.7	7.4	11	13	17.5	-	
Inch	1 1/2"	5.39	7	6.5	7.5	8	9.5	9.5	12	12	-	-	1.7	3.95	1.25	9	F05	8.1	10.3	16.3	24.2	28.6	38.5	-	
mm	50	150	190.5	178	216	231.5	292	295	368.5	371.5	-	-	47.5	113	38	225	F05	5	6.2	10.7	14.3	16.3	27.8	-	
Inch	2"	5.9	7.5	7	8.5	9.12	11.5	11.5	14.5	14.62	-	-	1.9	4.45	1.5	9	F05	11	13.6	23.5	31.5	35.9	61.2	-	
mm	65	158.8	216	190.5	241	257	330	333	419	422	-	-	58.5	118	49	225	F05	7.5	10	14.7	20	23	40	-	
Inch	2 1/2"	6.25	8.5	7.5	9.5	10.12	13	13.12	16.5	16.62	-	-	2.3	4.65	1.93	9	F05	16.5	22	32.3	44	50.6	88	-	
mm	80	184	241	203	282.5	298.2	355.6	358.6	-	-	-	-	70	135	63.5	360	F07	12.7	17	21.6	34	41	-	-	
Inch	3"	7.24	9.5	8	11.12	11.74	14	14.12	-	-	-	-	2.75	5.35	2.5	14	F07	27.9	37.4	47.5	74.8	90.2	-	-	
mm	100	222	282.5	228.5	305	320.5	432	435	-	-	-	-	88	150	76	500	F07	21.5	27.5	35	44	60	-	-	
Inch	4"	8.74	11.12	9	12	12.62	17	17.12	-	-	-	-	3.5	4.85	3	20	F07	47.3	60.5	77	96.8	132	-	-	

SALES ORGANIZATION



MAIN DISTRIBUTORS

**Norway, Sweden, Denmark, Netherlands,
Belgium, Switzerland, Austria, Greece,
Brasil, Usa, Canada, Australia, New Zeland, South Africa,
UAE, Czech Republic, Slovakia, Poland
Singapore, Romania, Oman, Saudi Arabia, Kuwait**

STARLINE S.p.A.

Via F. Baracca, 30 - 24060 S. PAOLO D'ARGON (Bergamo) ITALY

Phone: 0039 035/958041/958102 - Fax: 0039 035/958413

<http://www.starline.it> - e-mail: starline@starline.it

STARLINE BALL VALVES LTD
Telford Way Stephenson Ind. Est.
Coalville Leicestershire LE 67 3HE
Great Britain
Phone: 0044 (0)1530815818
Fax: 0044 (0)1530815819
<http://www.acvalvealliance.com>
e-mail: Starline@acvalvealliance.com

STARLINE FRANCE
7, Parc d'Activités
de la Verdrière 1
13880 VELAUX - France
Phone: 0033 (0)442878400
Fax: 0033 (0)442878404
<http://www.star-line.fr>
e-mail: infos@star-line.fr

STARLINE IBERICA S.A.
Poligono Industrial El Circuit
C/Rec Del Molinar F-3
08160 Montmelò Barcelona - Spain
Phone: 0034 (0)935799370
Fax: 0034 (0)935799244
<http://www.starline.es>
e-mail: starline@starline.es

STARLINE VALVES OY
Martinkyläntie, 39
01720 Vantaa - Finland
Phone: 0035 (0)898787711
Fax: 0035 (0)898787221
<http://www.starline.fi>
e-mail: starline@starline.fi

STARLINE Armaturen GmbH
Industriestrasse, 25
64569 Nauheim - Germany
Phone: 0049 (0)6152987655
Fax: 0049 (0)6152987656
e-mail: starline.gmbh@t-online.de

Your Representative: