


## EQUIVALENT FIRESAFE STANDARDS API 6A, API 607, BS 6755, ISO 10497

### Development of Firesafe Standards up to 2007

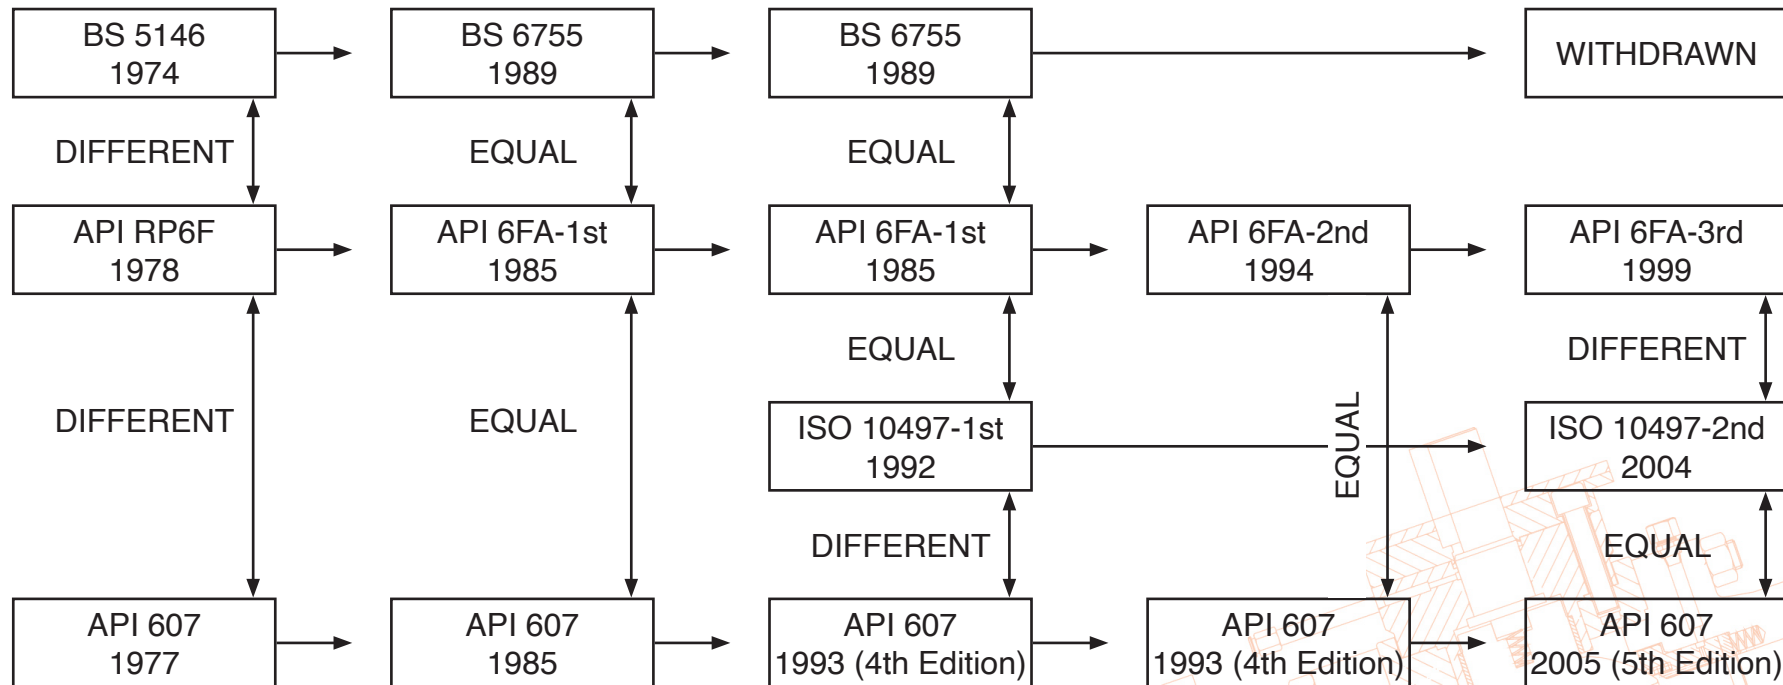

API 607 4th Edition & ISO 10497 - within 10 minutes after extinguishing the flames valve temperature must be below 100°C cooling with water spray. Rest of standards unforced cooling down.

Through leakage after cool down is at 2 barg in ISO 10497:2004 and at 75% of maximum cold working pressure in the rest of standards.

~ Fast Track Valve Manufacturer ~

Australian Pipeline Valve provides this technical information to assist the valve community. Please share and refer us to any specifiers or purchasers of valves/actuators within your network.

Click here for our full online stock list <https://www.globalsupplyline.com.au/stock-list-valves/>