

GUIDE VALVE LIMITED

VCI®

CSA Certified & FM Global Approved Emergency Safety Shut-Off Ball Valves



GLOBAL SupplyLine

Global Supply Line are Guide stockists, distributing Aust., NZ & PNG.

Stock lists at our website: www.globalsupplyline.com.au

Contact us: sales@globalsupplyline.com.au





Series 260 Actuated Units

- CSA6.5-CI & FM 7400 Certified Automated Units for -40°C (-40°F) to +65°C (+149°F)
- Valve Sizes ½" to 2"
- Certified to 175 PSIG & Rated to 1,000 PSIG
- 2-Piece Threaded Body, Regular Port
- Available in A351-CF8M
- ISO 5211 Neck Pad
- Available in Threaded End Connections only
- Blowout-proof stem
- Live loaded seats
- Uni-Directional
- Fire Safe Design

Manufactured & Tested to:



ASME / ANSI B16.5, B16.34; MSS SP-72, API 608;

NACE MR 0175; API 6D, API-598



Dimensions - Series 260											
Valve size	A	B	C	D	E	F	G	H	I	J	K
1/2	2.795	1.378	4.870	10.827	5.906	2.421	4.862	4.724	11.496	7.280	5.957
3/4	3.220	1.406	4.961	10.945	5.906	2.421	4.862	4.724	11.575	7.276	5.957
1	3.551	1.929	5.039	10.996	5.906	2.421	4.862	4.724	11.890	7.276	5.957
1 1/2	4.232	2.776	6.370	12.323	7.370	2.421	4.409	4.724	13.780	6.807	5.957
2	4.921	3.150	8.071	14.043	8.039	2.421	4.921	4.724	20.079	7.343	5.957

All dimensions in inches

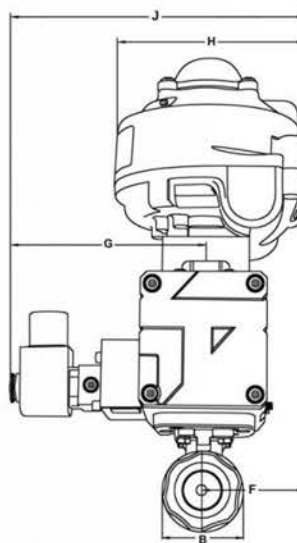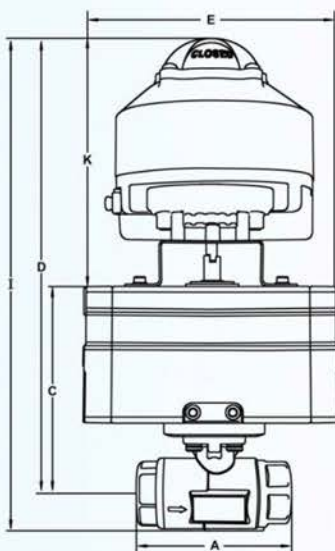

VCI® Series 201F Actuated Units



- CSA6.5-CI & FM 7400 Certified Automated Units for -40°C to +65°C (-40°F to +149°F)
- Valve Sizes ¼" to 2" in R.P. & ¼" to 1 ½" in F.P.
- Certified to 600 PSIG & Rated to 1,500 PSIG
- 3-Piece Bolted Body, Regular & Full Port
- Available in A351-CF8M, A216-WCB, and A352-LCC / LCB
- ISO 5211 Neck Pad
- Available in threaded, socket-welded, or butt-weld ends
- Blowout-proof stem & Adjustable stem packing
- Live loaded seats
- Bi-Directional & Uni-Directional
- Fire Safe Certified, API Standard 607 6th Edition, ISO 10497-2010

Manufactured & Tested to:

ASME / ANSI B16.5, B16.34; MSS SP-72, API 608;
NACE MR 0175; API 6D, API-598



Dimensions - Series 201F														
Valve dimensions				60 psi actuation					80 psi actuation					
Valve size	A	B	C	D	E	F	G	H	D	E	F	G	H	I
1/2	2.72	1.79	0.43	7.71	13.90	7.36	2.01	3.74	7.71	13.69	7.36	2.01	3.74	4.76
3/4	2.94	2.09	0.57	8.02	14.00	7.36	2.01	3.74	8.02	14.00	7.36	2.01	3.74	4.76
1	3.50	2.36	0.81	9.01	14.99	7.95	2.20	4.09	9.01	14.99	7.36	2.01	3.74	4.76
1 1/4	3.90	2.90	0.98	11.17	17.15	10.02	2.64	5.20	11.17	17.15	8.07	2.60	4.86	4.76
1 1/2	4.42	3.09	1.25	11.41	17.39	10.02	2.64	5.20	11.41	17.39	8.07	2.60	4.86	4.76
2	5.04	3.51	1.50	12.68	19.05	13.49	2.99	5.85	12.68	19.05	10.02	2.64	5.20	4.76
All dimensions in inches														

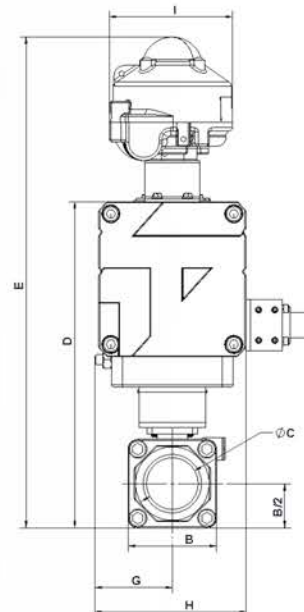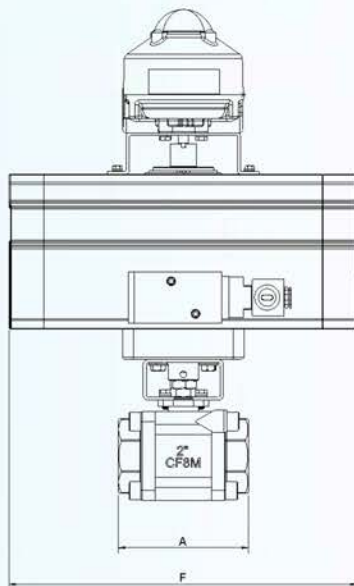

VCI[®] Series F200K Actuated Units

- CSA 6.5-CI Certified Automated Units for -40°C to +65°C (-40°F to +149°F) in sizes 1/2" to 6".
- CSA 6.5-CI Certified Automated Units for -45°C to +65°C -49°F to +149°F) in sizes 1/2" to 2".
- FM 7400 Certified Automated Units for -40°C to +65°C (-40°F to +149°F) in sizes 1/2" to 8".
- CSA Certified Manual Valves for -45°C to +65°C (-49°F to +149°F) in sizes 1/2" to 8".
- Valve Sizes 1/2" to 6", Class 150# & 300# A.N.S.I.
- Certified to 285 PSIG for 1/2"-4" & 125 PSIG for 6" and 8".
- 2-Piece Bolted Body, Full Port
- Available in A351-CF8M, A216-WCB, A352-LCC / LCB
- ISO 5211 Neck Pad
- RF Flanged ends
- Blowout-proof stem & Adjustable stem packing
- Live loaded seats
- Bi-Directional & Uni-Directional
- Fire Safe Certified, API Standard 607 6th Edition, ISO 10497-2010
- SIL 3 Certified by 3rd party organization: FSES
- Fugitive Emission Certified to ISO 15848-1 COS on select models

Manufactured & Tested to:



ASME / ANSI B16.5, B16.34; MSS SP-72, API 608;

NACE MR 0175; API 6D, API-598



Dimensions - Series F200K														
Valve dimensions				60 psi actuation					80 psi actuation					
Valve size	A	B	C	D	E	F	G	H	D	E	F	G	H	I
1/2	4.25	3.50	0.59	9.21	15.19	7.95	2.20	4.09	8.70	14.68	7.36	2.01	3.74	4.76
3/4	4.61	3.88	0.81	9.60	15.58	7.95	2.20	4.09	9.09	15.07	7.36	2.01	3.74	4.76
1	5.00	4.25	0.98	10.81	16.79	8.07	2.60	4.86	10.10	16.08	7.95	2.20	4.09	4.76
1 1/2	6.50	5.00	1.50	14.09	20.07	10.02	2.64	5.20	13.13	19.11	8.07	2.60	4.86	4.76
2	7.00	6.00	1.97	15.75	22.12	13.49	2.99	5.85	14.90	21.28	10.02	2.64	5.20	4.76
2 1/2	7.50	7.00	2.56	17.20	23.57	13.49	2.99	5.85	17.20	23.57	13.49	2.99	5.85	4.76
3	8.00	7.50	2.99	18.35	24.73	14.63	4.37	7.99	17.78	24.15	13.49	2.99	5.85	4.76
4	9.00	9.00	3.94	22.47	28.85	20.02	5.20	9.65	20.29	26.66	14.63	3.43	7.99	4.76
6	15.50	11.00	6.00	25.99	32.36	20.02	5.20	9.65	25.99	32.36	20.02	5.20	9.65	4.76

All dimensions in inches

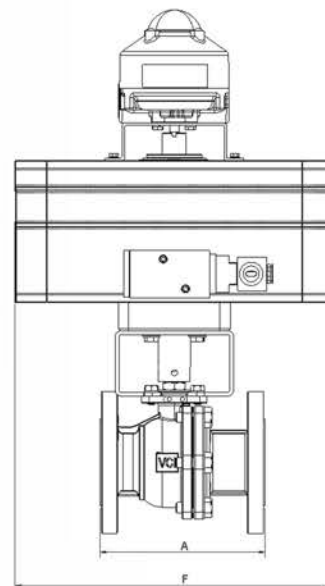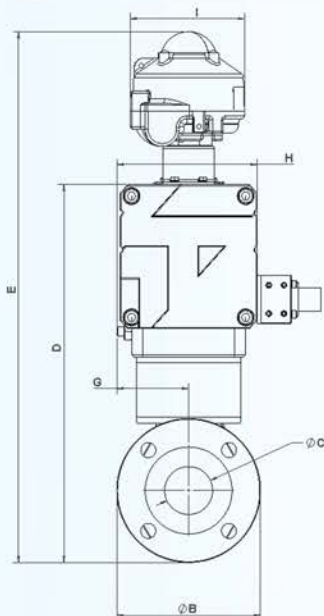



Series F100 Actuated Units

- FM 7400 Certified Automated Units for -29°C to +65°C (-20°F to +149°F)
- Valve Sizes: 4", 6" & 8", Class 150# & 300# A.N.S.I
- Certified to 285 PSIG
- 1-Piece Body, Reduced Port
- Available in A351-CF8M, A216-WCB, and A352-LCC / LCB
- ISO 5211 Neck Pad
- RF Flanged Ends
- Blowout-proof stem & Adjustable stem packing
- Live loaded seats
- Bi-Directional & Uni-Directional
- Fire Safe Design
- SIL Certified by 3rd party organization: FSES

Manufactured & Tested to:


ASME / ANSI B16.5, B16.34; MSS SP-72, API 608;



NACE MR 0175; API 6D, API-598



Dimensions - ANSI CLASS 150									
Valve Size	A	B	C	D	E	F	G	H	I
4	3.000	9.000	9.000	15.720	23.410	18.250	1.350	5.466	5.605
6	4.375	11.000	10.500	19.290	27.660	22.165	2.115	7.375	5.605
8	5.688	13.500	11.500	26.000	17.377	24.575	5.605	N/A	N/A
All dimensions in inches									

Dimensions - ANSI CLASS 300									
Valve Size	A	B	C	D	E	F	G	H	I
4	3.250	10.000	12.000	15.720	23.410	18.250	1.350	5.466	5.605
6	4.375	12.500	15.880	19.360	27.730	22.165	2.115	7.375	5.605
8	5.688	15.000	16.500	26.130	17.377	24.575	5.605	N/A	N/A

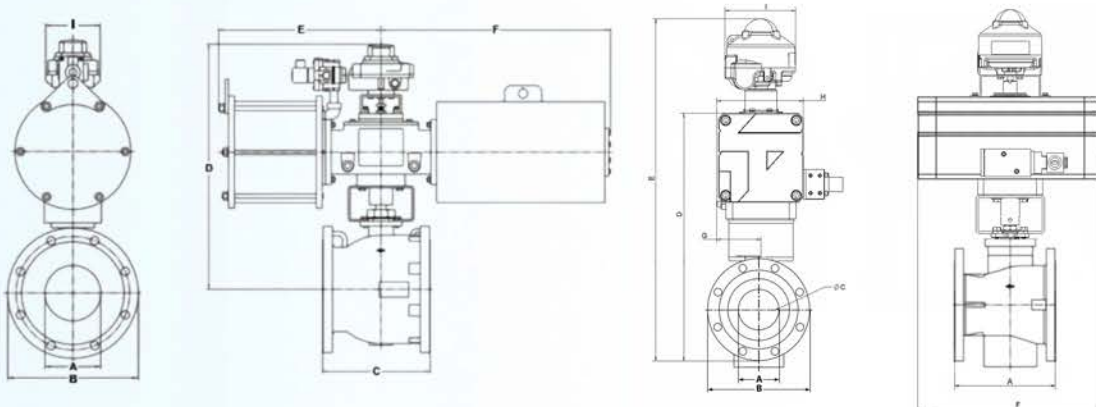

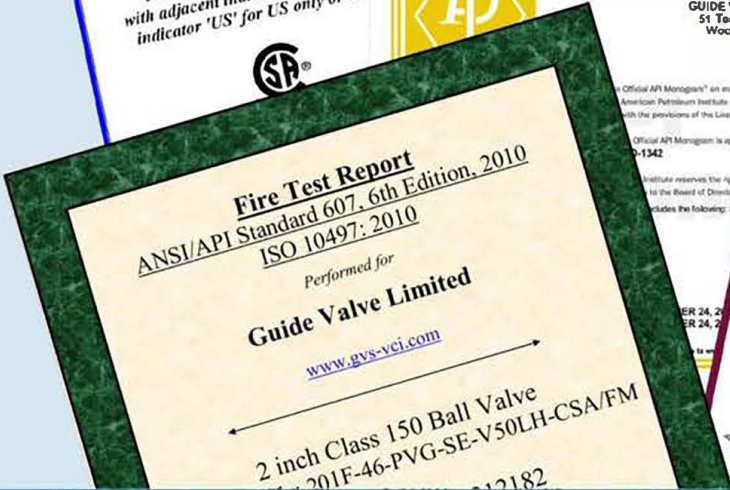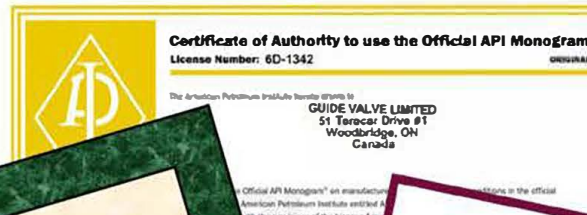

Guide Valve Limited

51 Terecar Dr., Unit 1
Woodbridge, ON CANADA L4L 0B5
Tel: 905-761-7877
Fax: 905-761-7917

Guide Valve USA Limited

16295 North Frwy Service Rd.
Building #17
Houston, Texas, 77090.
USA.

www.gvs-vci.com

sales@gvs-vci.com

Toll Free: 1-888-824-5693

Distributor / Agent:



Global Supply Line are Guide stockists, distributing Aust., NZ & PNG.
Stock lists at our website: www.globalsupplyline.com.au
Contact us: sales@globalsupplyline.com.au